

# Bradshaw Cord Maker Holders Plain and Fancy

Louise French  
[www.louisefrench.com](http://www.louisefrench.com)

## Plain



## Fancy



## **Drill holders for the Bradshaw Cord Maker.**

The cord maker can be used hand held, but if you are making many cords, it is tiring, and some way must be fashioned to hold the head firmly while adding and tensioning the threads.

We have designed and built two holders for the drill that powers the Bradshaw Cord Maker. We use the “Fancy” one because it is more stable, and frankly because we had the tools to make it. Not everyone does. So we also made a simple one that can be made with a handsaw and screw driver or glue. Ours were made with scrap wood that was on hand.

The purpose of the long board in front of the drill is to add stability when threading the Cord Maker; otherwise it tends to tilt forward. Self-stick felt pads (or a piece of carpet) on the bottom makes it slide nicely along your work surface. It also prevents marring the table top.

The attached “plans” are for guidance and are not intended to be exact blueprints. The “Plain” design needs lots of rubber bands firmly holding the drill in place for stability since it has no front piece to stop the drill from shifting forward while sliding during the twisting operation.

To use the cord maker, we set up the holder, drill and Bradshaw head at the end of a long table. After making taut the threads between the Bradshaw head and the outend (a board with 4 cup hooks) on the other side of the room, we turn on the drill and slide along the table, maintaining tension, until the desired initial over-twist is obtained (15% works for many yarns) is reached. We have a 15% distance mark on the table with masking tape. After the counter-twist we come back to the same mark. In both steps tension is maintained by the hand which controls the sliding of the drill and holder.

Louise French  
St Paul, Minnesota


## "Plain" Drill holder for Bradshaw Cord Maker

- Parts**
- one 12" x 4" x 1"
  - one 7" x 4" x 2"
  - one carpet scrap
  - two thin strips of wood, about 0.5" x 0.75" x 7" (cut lengthwise from 1 x 4 lumber)  
adjust size and position to be sure Bradshaw head is not hitting anything.


some screws  
Three rubber bands




**1 x 4 lumber**

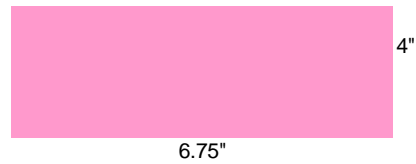


**2 x 4 lumber**



**Assembly side view**

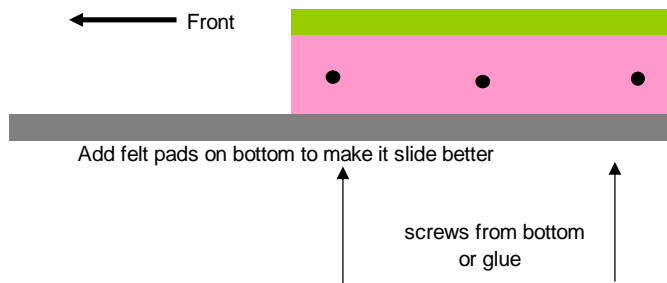


**End view from front**

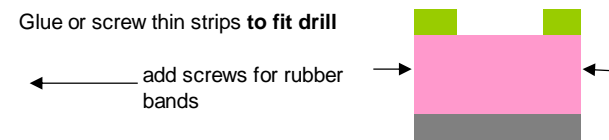


# "Fancy" Drill holder for Bradshaw Cord Maker

- Parts**
- one 12"x5"x1/2"
  - one 6.75"x5"x1/2"
  - one 6.75"x1.75"x1/2"
  - one 6.75"x1.25"x1/2" With a notch for drill trigger / direction button
  - two 5"x3"x1/4" end pieces. One with a notch for drill end
  - one carpet scrap
  - some screws
  - two rubber bands

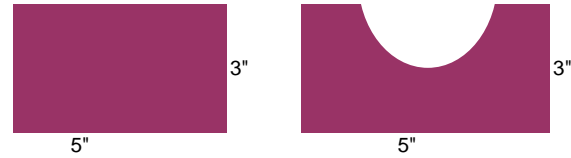

Be sure front notch is high enough for Bradshaw head to clear base board. Could be a vee instead of round.

## 1/2" plywood

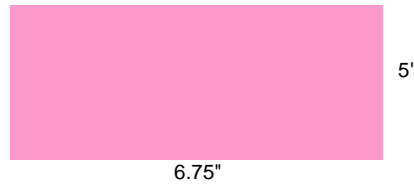

This piece is to support end pieces




Be sure these are high enough for Bradshaw head to clear base board




## 1/4" plywood (3/16" is OK)

### Assembly side view

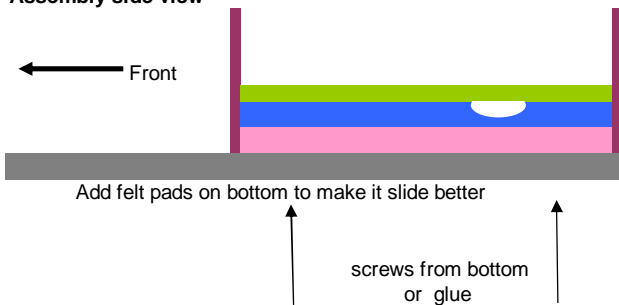

### End view from front

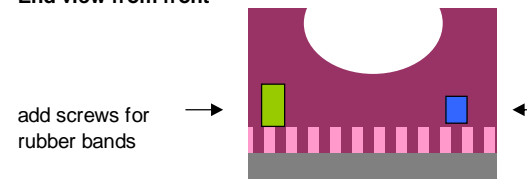

Screws for end pieces go into the support piece from front or back